


◀ 40 ▶	INDUCTION 3700 W								CE	German technology
			2+1	2	x	3	x			

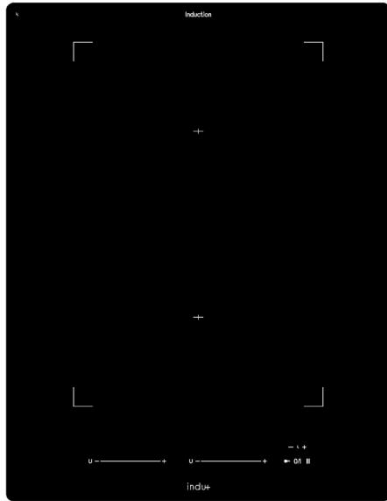

Grill function
Power limitation (10, 13 and 16A)

Glass

- > Glass 4 mm thickness
- > C edges
- > Size (WxD) : 400 x 520mm, R=5

Control

- > Slider Touch Control with direct access to 15 levels (0-9 + defrosting ≈42°C + keep warm ≈70°C + simmering water ≈94°C + booster + super-booster)
- > Dynamische LED power display
- > 2 timers simultaneously usable, egg timer
- > Stop & Go
- > Pause touch
- > Locking touch
- > Bridge function: allows to couple both zones to 1 big zone

Cooking zones

	∅ printing	∅ inductor	"9"*	Boosters*
2 equal inductors		220x180 mm	2100 W	2600/3700W

* With induction technology, the absorbed power can vary with the size and the quality of the pots

Installation

- > Electrical network 220-240 V ~ , 50/60 Hz
- > Casing (BxL) : 360 x 490 mm – appliance's height : 48mm + glass 4mm
- > Adapted for flushline installation

Security

- > Auto-Power (pan detection)
- > Auto-Stop (in case of inadvertent start, long absence, overflow, over-temperature)
- > 2 residual heat indicators
- > Protection against wrong electrical connection (400V)

Eco-design

- > Standby consumption < 0,5W
- > 100% recyclable packaging