







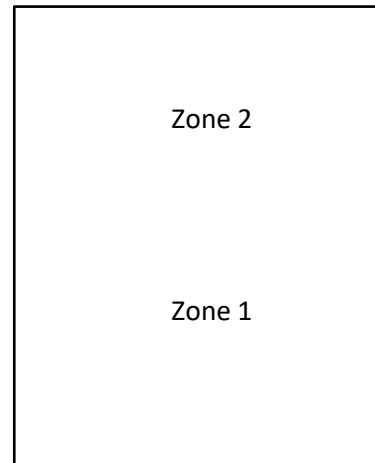
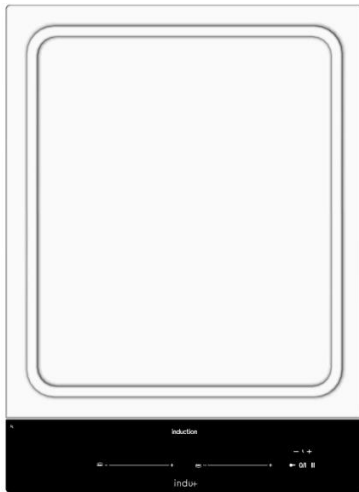


◀ 38 ▶	INDUCTION 2800 W		 2+1		 x		 x			German Technology
--------	---------------------	---	--	---	--	---	---	---	---	----------------------



### Top area

- > First-class 3-layer material made in Switzerland with stainless steel on top
- > Perfect flatness, even with huge temperature changes
- > Surrounding juice gutter
- > Dimensions (WxD) : 380 x 520 mm, R=5

### Cooking zones

- > 2 independent thermostatically controlled griddle areas of each 1400W
- > Powered with induction technology
  - Ready to cook within 2 minutes
  - Healthy cooking: no need to overheat the griddle area thanks to power and reactivity of induction technology (=> no noxious fumes)
  - Adapted to all type of food: 1st cooking levels preserves the nutritional qualities of vegetables (without risk the flame goes out), thick pieces of meat are seared rapidly and remain juicy
  - Cleaning function by each zone

### Control

- > 2 sliders touch control with direct access to each heating level (0-9 + clean function)
- > Dynamic temperature-display for both cooking areas
- > 2 x time, stand-alone timer, locking touch, stop&go function
- > Cleaning touches dedicated to each zone
- > Bridge function allows to couple both zones to 1 big zone

### Installation

- > Electrical network 220-240 V ~ , 50/60 Hz
- > Casing (WxD) 347 x 485mm – Thickness 6 mm (inox plate), total thickness 58 mm
- > Adapted for flushline installation

### Security

- > Auto-Stop function (in case of inadvertent start, long absence, over-temperature)
- > 2 residual heat indicators
- > Protection against wrong electrical connection(400V overvoltage)

### Eco-design

- > Standby consumption < 0,5W
- > 100% recyclable packaging