







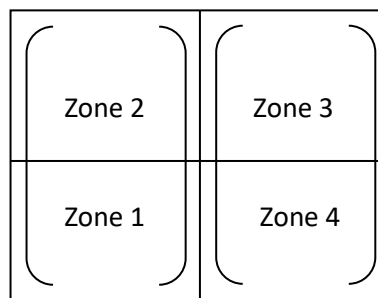
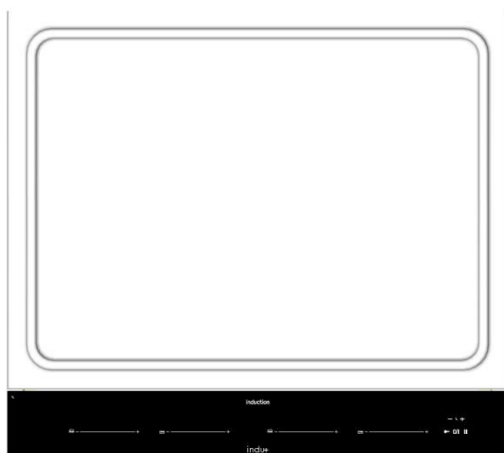


◀ <b>58</b> ▶	<b>INDUCTION</b> 5600 W		 4+1		 x		 x			<b>German Technology</b>
---------------	----------------------------	---	--	---	--	---	---	---	---	--------------------------



### Top area

- > First-class 3-layer material made in Switzerland with stainless steel on the top
- > Perfect flatness, even with huge temperature changes
- > Surrounding juice gutter
- > Control panel in KeraPro glass with light grey colored graphics
- > Dimensions (WxD): 580 x 520mm, R=5

### Cooking zones

- > 4 independent thermostatically controlled griddle areas (left and right zones can be bridged as described on the above sketch)
- > Powered with induction technology
  - Ready to cook within 2 minutes
  - Healthy cooking: no need to overheat the griddle area thanks to power and reactivity of induction technology (=> no noxious fumes)
  - Adapted to all type of food: 1<sup>st</sup> cooking levels preserves the nutritional qualities of vegetables (without risk the flame goes out), thick pieces of meat are seared rapidly and remain juicy
  - Cleaning function by each zone

### Control

- > 4x slider touch control with direct access to each heating level (0-9 + clean)
- > Dynamic temperature-display for both cooking areas
- > 4x Timer, stand-alone timer, locking touch, stop&go function
- > Cleaning touches dedicated to each zone
- > Bridge function allows to couple both zones as described on the above sketch

### Installation

- > Electrical network 220-240 V ~ , 50/60 Hz
- > Casing (WxD): 547 x 486 – Appliance is 60 mm high
- > Adapted for flushline installation
- > Delivered with documentation, sealing gasket and power cord

### Security

- > 4x residual heat indicators
- > Auto-Stop (in case of inadvertent start, long absence, over-temperature)
- > Protection against wrong electrical connection (400V overvoltage)

### Eco-design

- > Standby consumption < 0,5W
- > 100% recyclable packaging
- > Reduced transportation costs: 25 appliances a pallet